


2.36 Female Adapter

03. Fractional Stub x ISO Tapered (F)

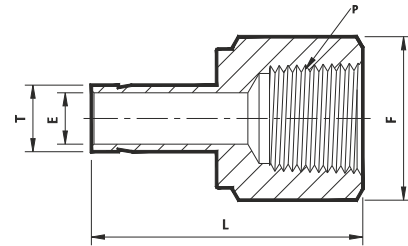

Sr. No.	TUBE OD Ø T	ISOT Female Pipe Size P	Ref. Part No.	ØE	L	Body Hex F
Dimensions in Inches						
1	1/4 x 1/8		4FAD 2IT	0.19	1.30	9/16
2	1/4 x 1/4		4FAD 4IT	0.19	1.45	3/4
3	3/8 x 1/4		6FAD 4IT	0.28	1.50	3/4
4	3/8 x 3/8		6FAD 6IT	0.28	1.59	7/8
5	1/2 x 1/4		8FAD 4IT	0.39	1.71	3/4
6	1/2 x 3/8		8FAD 6IT	0.39	1.80	7/8
7	1/2 x 1/2		8FAD 8IT	0.39	2.05	1.1/16

04. Metric Stub x ISO Tapered (F)

Sr. No.	TUBE OD Ø T	ISOT Female Pipe Size P	Ref. Part No.	ØE	L	Body Hex F
(mm)		(in)	Dimensions in Millimetres			
1	3 x 1/8		3MFAD 2IT	1.8	27.8	14
2	4 x 1/8		4MFAD 2IT	2.0	28.6	14
3	6 x 1/8		6MFAD 2IT	1.6	32.5	14
4	8 x 1/4		8MFAD 4IT	6.4	39.1	19
5	10 x 1/4		10MFAD 4IT	7.7	38.1	19
6	10 x 3/8		10MFAD 6IT	7.7	31.8	22
7	10 x 1/2		10MFAD 8IT	7.7	41.3	27
8	12 x 1/4		12MFAD 4IT	9.1	40.5	19
9	12 x 3/8		12MFAD 6IT	9.1	43.7	22
10	12 x 1/2		12MFAD 8IT	9.1	46.8	27
11	16 x 1/2		16MFAD 8IT	12.7	48.4	27
12	18 x 3/4		18MFAD 12IT	14.0	51.6	32
13	20 x 3/4		20MFAD 12IT	15.1	52.4	32
14	25 x 1		25MFAD 16IT	19.8	66.7	41

NOTE : ① The E Dimension is the minimum opening & Fittings of this group may be back drilling to lager ID at pipe thread or straight thread end.
② ISO Tapered (BSPT) thread as per BS 21.