
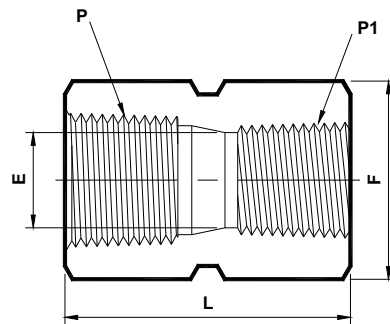


## 17. Hex Reducing Coupling

ISO Tapered (F) x ISO Tapered (F)  
(IT - PHRC - IT)



| Sr. No.              | ISO ②<br>Female Pipe<br>Size<br>P | ISO ②<br>Female Pipe<br>Size<br>P1 | Ref Part No. | L    | ØE ① | Hex<br>F |
|----------------------|-----------------------------------|------------------------------------|--------------|------|------|----------|
| Dimensions in Inches |                                   |                                    |              |      |      |          |
| 1                    | (3/8 x 19) x (1/4 x 19)           |                                    | 6PHRC 4IT    | 1.38 | 0.43 | 7/8      |
| 2                    | (1/2 x 14) x (1/4 x 19)           |                                    | 8PHRC 4IT    | 1.75 | 0.43 | 1.1/16   |
| 3                    | (1/2 x 14) x (3/8 x 19)           |                                    | 8PHRC 6IT    | 1.78 | 0.57 | 1.1/16   |

NOTE : ① The 'E' Dimension is the minimum opening.

② ISO (BSP Tapered) thread as per BS 21.