


2.34 Bulkhead Reducer

01. Fractional Tube x Fractional Stub

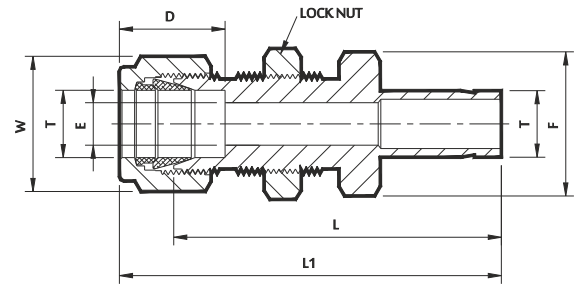


Sr. No.	TUBE OD Ø T	Ref. Part No.	ØE	D	C	L	L1	Body Hex F	Nut Hex W
Dimensions in Inches									
1	1/8	2BRD	0.08	0.50	0.60	1.69	1.95	1/2	7/16
2	1/4	4BRD	0.19	0.60	0.70	1.91	2.20	5/8	9/16
3	3/8	6BRD	0.28	0.66	0.76	2.12	2.41	3/4	11/16
4	1/2	8BRD	0.39	0.90	0.86	2.47	2.87	15/16	7/8
5	5/8	10BRD	0.50	0.96	0.86	2.56	2.96	1.1/16	1
6	1	16BRD	0.80	1.23	1.04	3.47	3.95	1.5/8	1.1/2

- For Lock Nut use 'BUND'

2.35 Male Adapter

01. Fractional Stub x O-seal NPT (M)

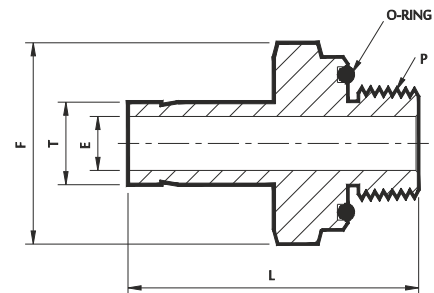

Sr. No.	TUBE OD Ø T	NPT Male Pipe Size P	Ref. Part No.	ØE	L	Body Hex F
Dimensions in Inches						
1	1/16 x 1/8		1MAD 2ON	0.05	1.03	3/4
2	1/4 x 1/8		4MAD 2ON	0.19	1.31	3/4
3	1/4 x 1/4		4MAD 4ON	0.19	1.44	15/16
4	1/4 x 3/8		4MAD 6ON	0.19	1.50	1-1/8
5	5/16 x 1/8		5MAD 2ON	0.19	1.34	3/4
6	5/16 x 1/4		5MAD 4ON	0.25	1.47	15/16
7	3/8 x 1/8		6MAD 2ON	0.19	1.38	3/4
8	3/8 x 1/4		6MAD 4ON	0.28	1.50	15/16
9	3/8 x 3/8		6MAD 6ON	0.28	1.59	1.1/8
10	1/2 x 3/8		8 MAD 6ON	0.38	1.78	1.1/8
11	5/8 x 1/2		10MAD 8ON	0.47	2.14	1.3/8
12	3/4 x 3/4		12MAD 12ON	0.62	2.16	1.1/2
13	1 x 1		16MAD 16ON	0.88	2.56	1.3/4

NOTE : ① The E Dimension is the minimum opening.
② Dimension L1, D is shown in the finger-tight position.