


2.22 Bulkhead Reducer Union

01. Fractional Tube x Fractional Tube

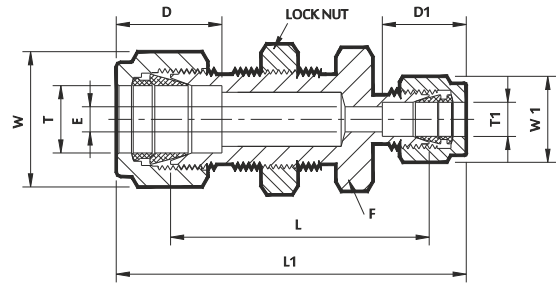


Sr. No.	TUBE OD Ø T	TUBE OD Ø T1	Ref. Part No.	ØE	D	D1	L	L1	Body Hex F	Nut Hex W	Nut Hex W
Dimensions in Inches											
1	1/4 x 1/8		4BRUD 2	0.09	0.60	0.50	1.62	2.17	5/8	9/16	7/16
2	3/8 x 1/4		6BRUD 4	0.19	0.66	0.60	1.81	2.39	3/4	11/16	9/16
3	1/2 x 1/4		8BRUD 4	0.19	0.90	0.60	1.94	2.63	7/8	7/8	9/16

- For Lock Nut use 'BUND'

2.23 Bulkhead Union Elbow

01. Fractional Tube x Fractional Tube

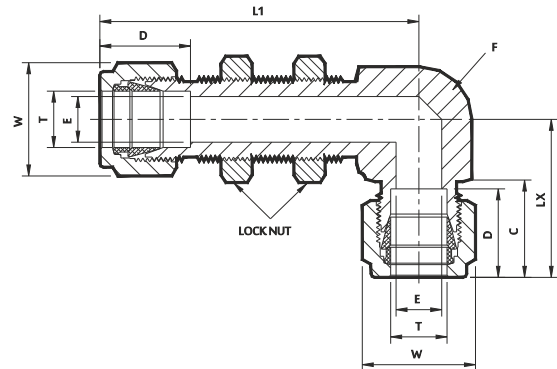

Sr. No.	TUBE OD Ø T	Ref. Part No.	ØE	D	C	L1	LX	Body Hex F	Nut Hex W
Dimensions in Inches									
1	1/8	2BUED	0.09	0.50	0.60	1.93	0.88	1/2	7/16
2	3/16	3BUED	0.12	0.54	0.63	2.03	1.01	1/2	1/2
3	1/4	4BUED	0.19	0.60	0.70	2.10	1.07	9/16	9/16
4	5/16	5BUED	0.25	0.64	0.73	2.30	1.17	9/16	5/8
5	3/8	6BUED	0.28	0.66	0.76	2.36	1.20	11/16	11/16
6	1/2	8BUED	0.41	0.90	0.86	2.67	1.38	13/16	7/8
7	5/8	10BUED	0.50	0.96	0.86	2.82	1.46	7/8	1
8	3/4	12BUED	0.62	0.96	0.86	3.08	1.51	1.1/16	1.1/8

- For Lock Nut use 'BUND'

NOTE : ① The E Dimension is the minimum opening.
② Dimension L1, D, D1 is shown in the finger-tight position.