


2.10 Positionable Male Branch Tee

01. Fractional Tube x ISO Parallel (M)

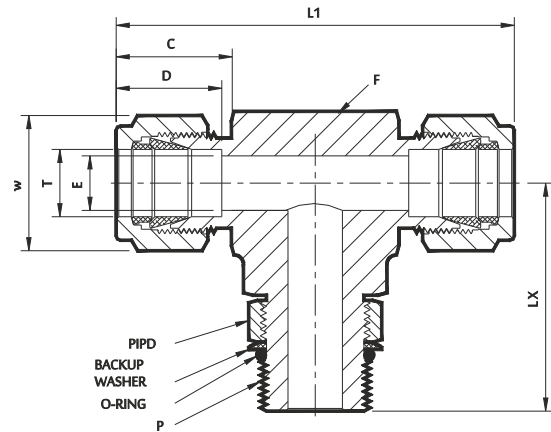

Sr. No.	TUBE OD Ø T	ISOP Male Pipe Size P	Ref. Part No.	ØE	D	C	L1	LX	Body Hex F	Nut Hex W
Dimensions in Inches										
1	1/4 x 1/8		4PMBTD 2IP	0.16	0.60	0.70	2.12	1.04	9/16	9/16
2	1/4 x 1/4		4PMBTD 4IP	0.19			2.28	1.27	5/8	
3	3/8 x 1/4		6 PMBTD 4IP	0.20	0.66	0.76	2.40	1.27	5/8	11/16
4	1/2 x 3/8		8PMBTD 6IP	0.31	0.90	0.86	2.84	1.46	7/8	7/8
5	1/2 x 1/2		8PMBTD 8IP	0.41			3.00	1.71	15/16	
6	5/8 x 1/2		10PMBTD 8IP	0.47	0.96	0.86	3.00	1.71	15/16	1
7	3/4 x 3/4		12PMBTD 12IP	0.62	0.96	0.86	3.14	1.92	1.1/16	1.1/8
8	3/4 x 1/2		12PMBTD 8IP	0.47			3.14	1.78	1.1/16	
9	1 x 1		1PMBTD 16IP	0.78	1.23	1.04	3.86	2.11	1.3/8	1.1/2

02. Metric Tube x ISO Parallel (M)

Sr. No.	TUBE OD Ø T	ISOP Male Pipe Size P	Ref. Part No.	ØE	D	C	L1	LX	Body Hex F	Nut Hex W
Dimensions in Millimetres										
	(mm)	(in)								
1	6 x 1/8		6MPMBTD 2IP	4.0	15.3	17.7	53.9	26.4	15	14.2
2	6 x 1/4		6MPMBTD 4IP	4.8			58.0	32.2	17.5	
3	8 x 1/8		8MPMBTD 2IP	4.0	16.2	18.6	57.7	27.4	15	16
4	8 x 1/4		8MPMBTD 4IP	5.9			59.7	32.2	17.5	
5	10 x 1/4		10MPMBTD 4IP	5.9	17.2	19.5	67.0	35.0	20.5	19
6	12 x 3/8		12MPMBTD 6IP	7.9	22.8	22.0	72.0	37.1	20.5	22.2
7	12 x 1/2		12MPMBTD 8IP	9.5			76.1	43.4	27.5	

NOTE : ① The E Dimension is the minimum opening & Fittings of this group may be back drilling to lager ID at pipe thread or straight thread end
 ② Dimension L1, C, D is shown in the finger-tight position.
 ③ ISO Parallel (BSPP) thread as per BS 2779.