


26. Female Tee

ISO Tapered (F) x ISO Tapered (F) x ISO Tapered (F)
(IT - PFT)

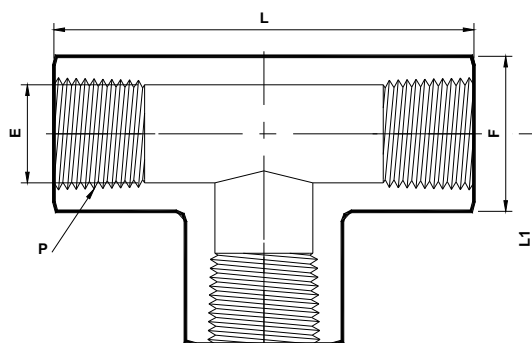


Sr. No.	ISO ② Female Pipe Size P	Ref Part No.	L	L1	ØE ①	Hex F
Dimensions in Inches						
1	1/4 x 19	4IT PFT	2.34	1.17	0.43	3/4
2	3/8 x 19	6IT PFT	2.84	1.42	0.57	7/8
3	1/2 x 14	8IT PFT	3.12	1.56	0.71	1.1/16

NOTE : ① The 'E' Dimension is the minimum opening.

② ISO (BSP Tapered) thread as per BS 21.

27. Street Tee

NPT (F) x NPT (M) x NPT (F)
(N - PST)

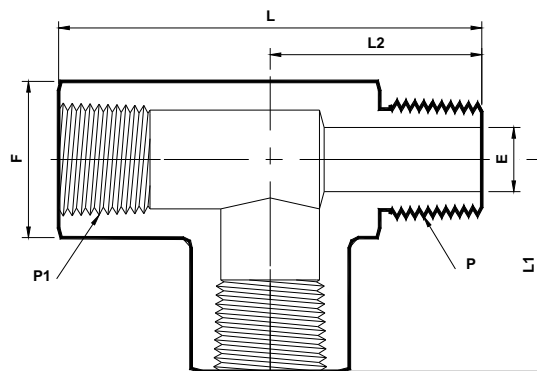

Sr. No.	NPT ② Male Pipe Size P	NPT ② Female Pipe Size P1	Ref Part No.	L	L1	L2	ØE ①	Hex F
Dimensions in Inches								
1	(1/16 x 27) x (1/16 x 27)		1N PST	1.22	0.50	0.72	0.12	7/16
2	(1/8 x 27) x (1/8 x 27)		2N PST	1.91	1.04	0.87	0.19	9/16
3	(1/4 x 18) x (1/4 x 18)		4N PST	2.34	1.17	1.17	0.28	3/4
4	(3/8 x 18) x (3/8 x 18)		6N PST	2.68	1.42	1.26	0.38	7/8
5	(1/2 x 14) x (1/2 x 14)		8N PST	3.12	1.56	1.56	0.47	1.1/16
6	(3/4 x 14) x (3/4 x 14)		12N PST	2.95	1.36	1.59	0.57	1.1/4
7	(1 x 11.5) x (1 x 11.5)		16N PST	3.60	1.63	1.97	0.71	1.5/8

NOTE : ① The 'E' Dimension is the minimum opening.

② NPT thread as per ANSI B 1.20.1.