


06. Adapter

NPT (M) x NPT (F)
(N - PA)

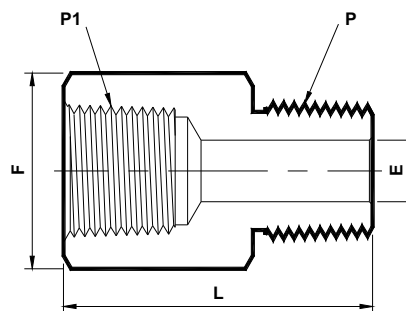


Sr. No.	NPT ② Male Pipe Size P	NPT ② Female Pipe Size P1	Ref Part No.	L	ØE ①	Hex F
Dimensions in Inches						
1	(1/8 x 27) x (1/8 x 27)		2N PA	1.10	0.19	9/16
2	(1/4 x 18) x (1/4 x 18)		4N PA	1.40	0.28	3/4
3	(3/8 x 18) x (3/8 x 18)		6N PA	1.51	0.38	7/8
4	(1/2 x 14) x (1/2 x 14)		8N PA	1.94	0.47	1.1/16
5	(3/4 x 14) x (3/4 x 14)		12N PA	2.02	0.62	1.1/4
6	(1 x 11.5) x (1 x 11.5)		16N PA	2.28	0.88	1.5/8

NOTE : ① The 'E' Dimension is the minimum opening.

② NPT thread as per ANSI B 1.20.1.

07. Adapter

ISO Tapered (M) x ISO Tapered (F)
(IT - PA)

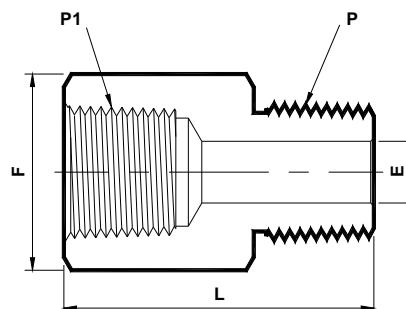

Sr. No.	ISO ② Male Pipe Size P	ISO ② Female Pipe Size P1	Ref Part No.	L	ØE ①	Hex F
Dimensions in Inches						
1	(1/8 x 28) x (1/8 x 28)		2IT PA	1.09	0.18	9/16
2	(1/4 x 19) x (1/4 x 19)		4IT PA	1.42	0.28	3/4
3	(3/8 x 19) x (3/8 x 19)		6IT PA	1.50	0.37	7/8
4	(1/2 x 14) x (1/2 x 14)		8IT PA	1.95	0.46	1.1/16

NOTE : ① The 'E' Dimension is the minimum opening.

② ISO (BSP Tapered) thread as per BS 21.